

SR104P

User Information for SR104P

Correct Use

The SR104P 2-hand safety relay is an extremely compact, universal safety two-hand control unit. It complies with EN574, Typ III C, and is intended for use in safety circuits that are designed in accordance with EN 60204-1, e.g. on presses, punches and bending tools. Due to the internal error monitoring, the 2-hand safety relay can be used, despite very compact dimensions, for all applications up to the highest safety category 4 and PL e according to EN ISO 13849-1, SILCL 3 according to EN 62061 or Typ III C according to EN 574.



(not dor plug-in terminals)

Features

- 2 safe, redundant relay outputs
- Cyclical monitoring of the output contacts
- Feedback loop for monitoring downstream contactors or expansion modules
- Short circuit and earth fault monitoring
- Extrem compact housing

- Up to PL e, SILCL 3, category 4

Function

The OMRON STI 2-hand safety relay SR104P is suitable for setting up and monitoring two-hand circuits and is used to protect the operators. Dangerous work steps can only be triggered when both two-hand buttons connected are operated simultaneously, i.e. within 0.5s.

It is to be ensured a single fault or a malfunction does not result in the loss of the safety function and every fault is detected by the cyclic self-monitoring at the latest prior to the next actuation.

When the operating voltage is applied to A1-A2 and the feedback loop X1-X2 is closed, the SR104P is ready for use. To be able to initiate a switching operation, the output relays must be de-energized. The output relays only switch to the energized position when the two-hand buttons T1 and T2 are operated simultaneously, i.e. within 0.5s.

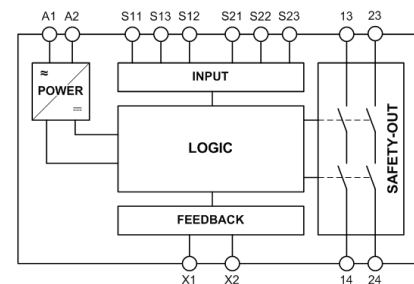


Fig. 1 Block diagram SR104P

The output relays are not switched if:

- only one two-hand button is actuated or the time between the actuation of the 2 two-hand buttons is greater than 0.5s,
- the feedback loop is open (fault in the external contactor),
- another error (short circuit, cable break, error in the switching device) has occurred.

When T1 and/or T2 are/is released, the output relays opens immediately. In order to trigger a new operation, both two-hand buttons must first be released and the feedback loop must be closed.

Installation

As per DIN EN 60204-1, the device is intended for installation in control cabinets with a minimum degree of protection of IP54. It is mounted on a 35-mm DIN rail according to DIN EN 60715 TH35.

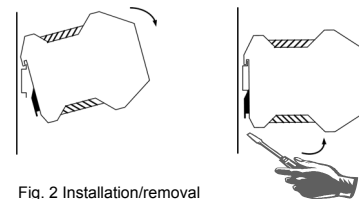


Fig. 2 Installation/removal


Safety Precautions



- Installation an setup are only allowed to be undertaken by trained personell.
- The electrical connection is only allowed to be made with the device and wiring isolated.
- The wiring must comply with the instructions in this user information, otherwise there is a risk that the safety function will be lost.
- As per EN 60204-1 the device is intended for installation in control cabinets with a minimum degree of protection of IP54.
- It is not allowed to open the device, tamper with the device or bypass the safety devices.
- All relevant safety regulations and standards are to be observed.
- The overall concept for the control system in which the device is integrated is to be validated.
- Failure to observe the safety regulations can result in death, serious injury and serious damage.

Electrical Connection

- When the 24V version is used, a control transformer according to EN 61558-2-6 or a power supply unit with electrical isolation from the mains must be connected.
- External fusing of the safety contacts (4A slow-blow or 6A quick-action or 10A gG) must be provided.
- A maximum length of the control lines of 1000 meters with a line cross section of 0.75 mm² must not be exceeded.
- The line cross section must not exceed 2.5 mm².
- If the device does not function after commissioning, it must be returned to the manufacturer unopened. Opening the device will void the warranty.



- A1: Power supply
- A2: Power supply
- S11: Control line T1
- S12: Control line T1
- S13: Control line T1
- S21: Control line T2
- S22: Control line T2
- S23: Control line T2
- X1; X2: Feedback loop
- 13-14: Safety contact 1
- 23-24: Safety contact 2

Fig. 3 Connections

SR104P

User Information for SR104P

Applications

The arrangement of the two-hand buttons must be designed in accordance with the standard EN 574 such that accidental actuation or simple bypassing of the safety function is excluded.
The SR104P unit is provided for the connection of 2-hand push-buttons, with one normally open or one normally closed contact.

Figur 1 shows the wiring of the SR104P with a 2-hand push-buttons:




Fig. 1:
Wiring of the SR104P with a 2-hand push-buttons

Feedback loop




Fig. 2: Feedback loop

Contactors connected to the SR104P or the basic devices are monitored via the feedback loop of the basic device. KA and KB are the positively driven contacts of the connected contactor or expansion module.

Installation

Avoiding unintentional actuation or bypassing of the safety device

The arrangement of the two-hand buttons must be designed in accordance with the standard EN 574 such that accidental actuation or simple bypassing of the safety function is excluded.

The operation of both buttons using one hand must be prevented by an adequate distance (at least 260mm) or by a separating wall. Actuation using forearm, elbow, knee, hip or other parts of the body can be effectively prevented by a further increase in the distance between the two buttons, adequate distance from the floor and/or covers and/or separating walls.

Distance from the two-hand buttons to the danger area

It is necessary to maintain a minimum distance between the buttons for the two-hand circuit and the danger area on the machine or plant so that, after the release of one or both buttons, the machine or plant can only be reached once the dangerous movement has been interrupted or completed. According to the standard EN 999, the distance is calculated with the following equation:

$$S = (K \cdot T) + C$$

S: Minimum distance from the nearest pushbutton (two-hand button) to the danger area.

K: Parameter in mm/s, derived from data on the approach speeds of the body or parts of the body, for two-hand circuits 1600mm/s.

T: The overtravel of the overall system in seconds, that is the time from releasing the two-hand button to the end of the dangerous movement.

C: Additional distance in mm that based on entry into the danger area prior to the triggering of the safety device. For twohand circuits this is 250mm, this distance can also be set to 0mm given an adequate cover on the buttons, however then S must be at least 100mm.

Example

The overtravel time for the entire system is 90ms. Then the above equation gives for the minimum distance:

$$S = (1600 \text{ mm/s} \cdot 0.09 \text{ s}) + 250 \text{ mm}$$

$$S = 144 \text{ mm} + 250 \text{ mm} = 394 \text{ mm}$$

If a suitable cover is used, S can be reduced to 144mm (see above).

Commissioning Procedure

Note: The items listed under "Electrical connection" must be observed during commissioning.

1. Wiring SR104P:

Wire the SR104P with the OMRON STI basic device according to your application (see Fig. 1).

2. Wiring feedback loop:

Wire the feedback loop as shown in Fig. 2.

3. Wiring power supply:

Connect the power supply to terminals A1 and A2.

4. Starting the device:

Switch the operating voltage on.

5. Switch to working condition:

Press the two buttons T1 and T2 simultaneously, or within 0.5 seconds.

The positive-guided relay switches.

6. Switch into hibernation:

Release the two buttons T1 and T2.

The positive-guided relay switches off.

Warning: Wiring only in de-energized state.



SR104P

User Information for SR104P

Maintenance Once per month, the device must be checked for proper function and for signs of tampering and bypassing of the safety function (to do this, check the wiring of the device and activate the emergency stop function. Check the delay time). The device is otherwise maintenance free, provided that it was installed properly.

What to Do in Case of a Fault? Device does not switch on:
 • Check whether the 2-hand button of correct function.
 • Check whether the wiring.
 • Check the supply voltage on A1 and A2
 • Is the feedback loop closed?
 If the fault still exists, perform the steps listed under "Commissioning Procedure".
 If these steps do not remedy the fault either, return the device to the manufacturer for examination.
 Opening the device is impermissible and will void the warranty.

Safety Characteristics According to EN ISO 13849-1 The device is certified according to EN ISO 13849-1 up to a Performance Level of PL e. Note: Additional data can be requested from the manufacturer for applications that deviate from these conditions.

Safety characteristics according to EN ISO 13849-1 for all variants of SR104P			
Load (DC13; 24V)	<= 0,1A	<= 1A	<= 3A
T10d [years]	20	20	20
Category:	4	4	4
PL	e	e	e
PFHd [1/h]:	1,2E-08	1,2E-08	1,2E-08
nop [cycle / year]	<= 400.000	<= 100.000	<= 22.500


Technical Data

Corresponds to the standards	EN574, EN60204-1, EN ISO 13849-1, EN 62061
Operating voltage	SR104P01 SR104P02 AC/DC 24V AC 115V
Rated supply frequency	AC: 50-60Hz
Permissible deviation	+/- 10%
Power consumption	DC 24V ca. 1.5W
Control voltage at S12-S12 and at S22-S23	DC 24V
Control current (both switches)	ca. 2 x 40mA
Release time for the safety relays after release of a button	< 20ms
Response delay after actuation of the buttons	< 20ms
Synchronization time	< 0.5s
Safety contact configuration	2 NO contacts
Max. switching voltage	AC 250V
Safety contact breaking capacity	AC: 250V, 200VA, 8A for ohmic load, 230V, 3A for AC-15 DC: 24V, 192W, 8A for ohmic load; 24V, 3A for DC-13
Max. total current through all contacts:	12 A
Minimum contact load	24V, 20mA
Min. Contact fuses	6A slow-blow or 8 A quick-action or 10A gG
Max. line cross section	0.14 - 2.5mm ²
Max. length of control line	1000m with 0.75mm ²
Contact material	AgSNO ₂
Contact service life	mech. approx. 1 x 10 ⁷ , electr. 1 x 10 ⁵ operating cycles
Test voltage	2.5kV (control voltage/contacts)
Rated impulse withstand voltage, leakage path/air gap	4kV (DIN VDE 0110-1)
Rated insulation voltage	250V
Degree of protection	IP20
Degree of contamination	2 (DIN VDE 0110-1)
Overvoltage category	3 (DIN VDE 0110-1)
Temperature range	DC 24V: -15°C to +60°C AC 230/115V: -15°C to +40°C
Weight	ca. 230g
Mounting	DIN rail according to EN 60715TH35

SR104P

User Information for SR104P

Dimension



EC Declaration of Conformity

The manufacturer named below herewith declares that the product fulfills the provisions of the directive(s) listed below and that the related standards have been applied.

OMRON Scientific Technologies Inc.
6550 Dumbarton Circle
Fremont, CA 94555, U.S.A.

Directives applied:
EMC directive 2004/108/EC
Machinery directive 2006/42/EC
RoHS directive 2002/95/EC

Standards applied:
EN ISO 13849-1:2008 + AC:2009
EN 62061:2005
EN ISO 13849-2:2008
EN 60947-5-1:2004 + A1:2009
EN 574:1996 + A1:2008 (only for SR104P0X)

Certificates:01/205/5083/11
TÜV: NB 0035
TÜV Rheinland Industrie Service GmbH - TÜV Rheinland Group
AM Grauen Stein, 51105 Köln, Germany

Fremont, May 2014

Marty Krikorian
Director, Quality Control
(Authorized Signer of Declarations of Conformity)
OMRON Scientific Technologies, Inc.

Representative in EU:J.H.P.W.Vogelaar
European Quality & Environment Operations Manager
Omron Europe B.V
Zilverenbert 2, 5234 GM, 's-Hertogenbosch
The Netherlands

The signed EC Declaration of Conformity is included with the product.

OMRON AUTOMATION AND SAFETY • THE AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE

México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • www.industrial.omron.eu

Authorized Distributor:

Automation Control Systems

- Machine Automation Controllers (MAC) • Programmable Controllers (PLC)
- Operator interfaces (HMI) • Distributed I/O • Software

Drives & Motion Controls

- Servo & AC Drives • Motion Controllers & Encoders

Temperature & Process Controllers

- Single and Multi-loop Controllers

Sensors & Vision

- Proximity Sensors • Photoelectric Sensors • Fiber-Optic Sensors
- Amplified Photomicrosensors • Measurement Sensors
- Ultrasonic Sensors • Vision Sensors

Industrial Components

- RFID/Code Readers • Relays • Pushbuttons & Indicators
- Limit and Basic Switches • Timers • Counters • Metering Devices
- Power Supplies

Safety

- Laser Scanners • Safety Mats • Edges and Bumpers • Programmable Safety Controllers • Light Curtains • Safety Relays • Safety Interlock Switches