

For full product information, visit www.sti.com. Use the SpeedSPEC Code for quick access to the specific web page.

Resource Module — Converts Solid-State Outputs to Force-Guided Relay Outputs

- Converts the solid-state safety outputs of one STI safety device to electro-mechanical force-guided safety relay outputs
- Compatible with MS4800, F3SJ, PA4600, OS3101 and OS32C
- CE approved
- 55 mm DIN enclosure
- Removable terminal blocks
- A Rapid Delivery Product: Select models are available for shipment today or within 3 to 5 days



D



File No. LR90200-34

Specifications

Performance	
Response Time:	< 8 ms
Indicators:	LED, 2 green-power to output relay
Electrical	
Input Power:	24 VDC , 2.6 VA (from safety source)
Safety Outputs:	Two N.O. force-guided contacts, rated 250 VAC, 6 A
Auxiliary (Non-Safety) Outputs:	Two N.C. force-guided contacts, rated 250 VAC, 6 A
MPCE Monitor:	The RM-1 relay safety outputs may be monitored by the light curtain
Cable Connections/ Terminal Blocks:	2 rows of removable terminal blocks, 14 AWG max. wire
Environmental	
Enclosure Rating:	IP20
Operating Temperature:	0 to 55°C (32 to 131°F)
Relative Humidity:	95% maximum, non-condensing
Conformity/ Approvals	
Conformity to Standards:	CE approved and conforms to IEC 61496-1, IEC 61508, EN 954-1, EN 60204-1, EN 50178, and Type 4* safety category. UL listed.
Mechanical	
Enclosure:	Polycarbonate
Mounting:	DIN rail mount
Dimensions:	55 mm W x 75 mm H x 110 mm D (2.17 in. W x 2.95 in. H x 4.33 in. D)

* When used with a STI Type 4 safety light curtain.
Specifications are subject to change without notice.

Description


The RM-1 is a resource module in a DIN type enclosure. When used in conjunction with STI safety devices, it provides output conversion from solid-state to a mechanical relay output. Two N.O. safety relay outputs and two N.C. auxiliary relay outputs are provided. These relays are force-guided and can be used for the machine's primary controls (refer to the specifications for contact ratings). Removable terminal blocks facilitate installation and servicing.

 Select models are available for Rapid Delivery.

Visit this product on www.sti.com for details.

Dimensions



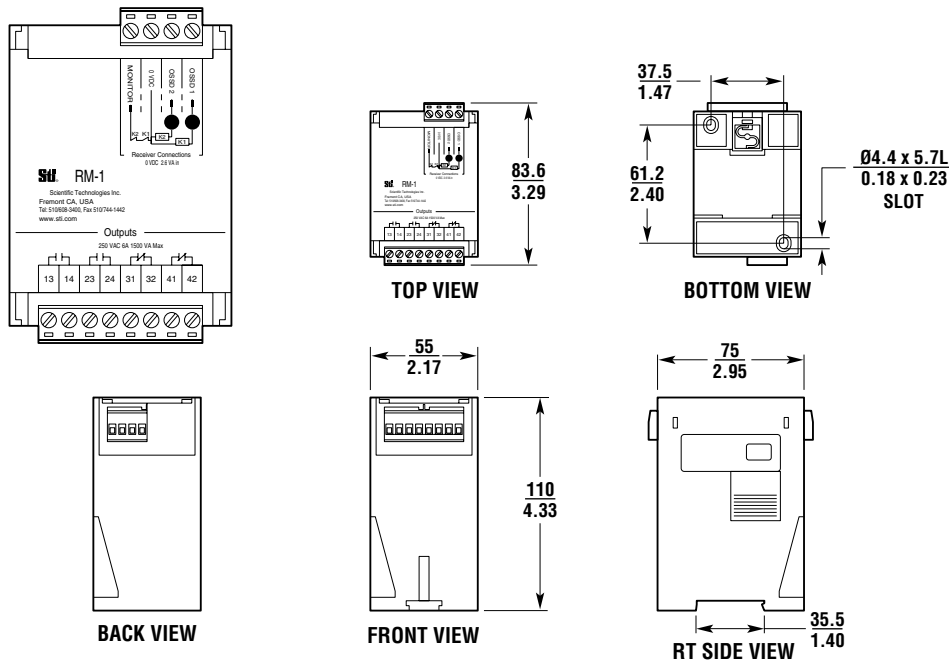


(mm/in.)



D

Ordering

Model No.	Description
RM-1	Resource module, 24 VDC, DIN rail-mount

-  For information on the OS32C, see page B-6
-  For information on the PA4600, see page D-37
-  For information on the F3SJ, see page D-37
-  For information on the MS4800, see page D-46
-  For information on safety light curtain accessories, see page D-78

 Select models are available for Rapid Delivery.

Visit this product on www.sti.com for details.