


CX-Designer Library Updates Installation Directions


There are two types of CX-Designer Library Updates: **Bitmap Library Updates**, and **Library Templates Update**. The **Bitmap Library Updates** are included with CX-One Auto Update, and have been included in this file for those who only wish to update their graphic library and not overall software functionality or version number. The **Library Templates Update** files are not included in the CX-One Auto Update, and can only be installed using the included files. Both provide updated graphical items for quicker implementation of attractive user screens. However, installation is optional and will not affect performance or operation of the NS-Series Operator Interface Panel.


Bitmap Library Update

- 1) Close all instances of CX-Designer
- 2) Browse to the downloaded files in the directory **CX-Designer_Lib_Update** (where these installation directions were found)

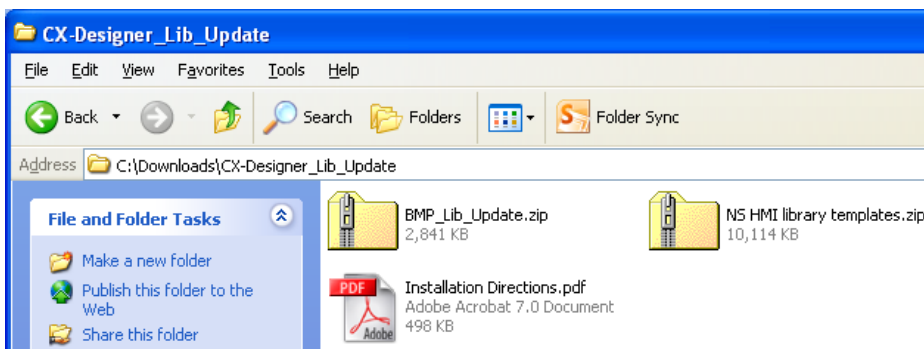


- 3) Extract the file *BMP_Lib_Updates.zip* directly into the directory **C:\Program Files\OMRON\CX-One\CX-Designer\intaparts\BMPfiles**

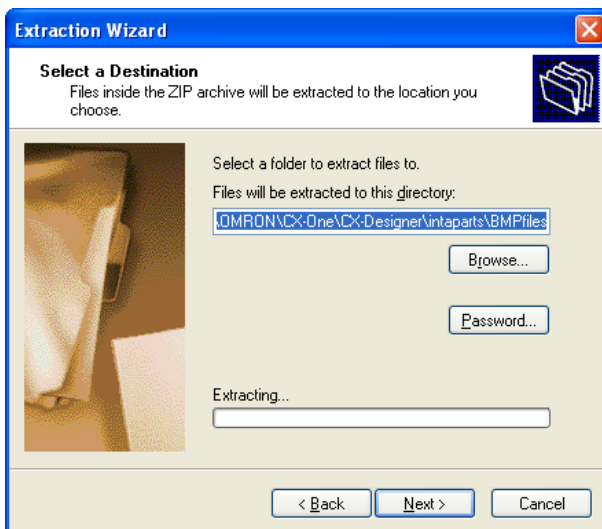

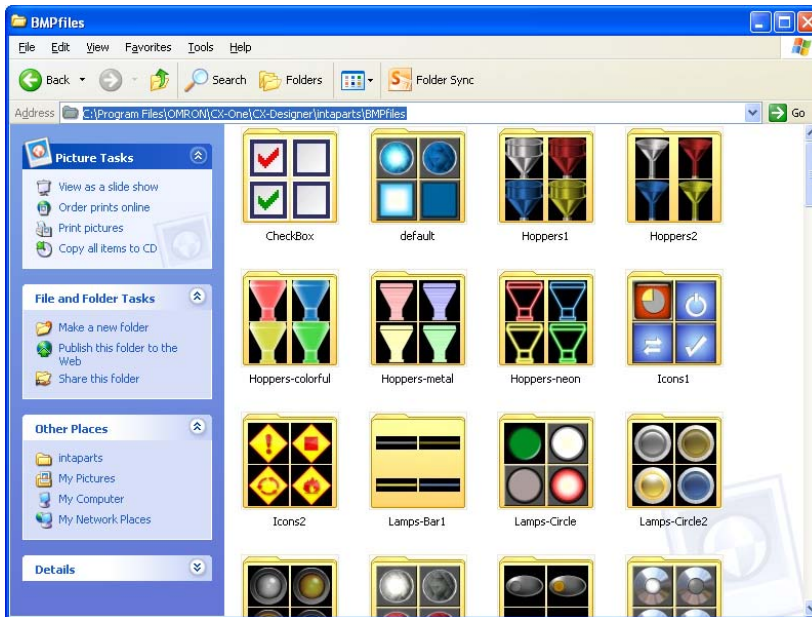


- 4) The Bitmap Library Update is complete, and the new CX-Designer Bitmap Library items can be found when creating a new *Functional Object* and selecting the *Color/Shape*


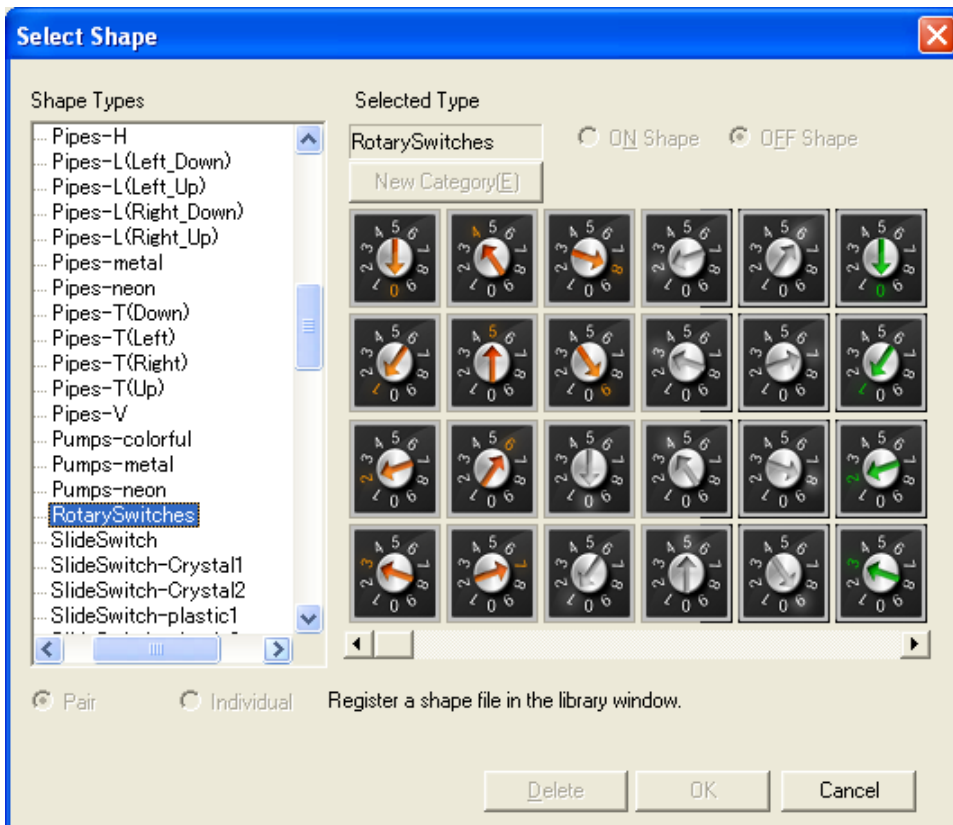


Library Templates Update




- 1) Close all instances of CX-Designer
- 2) Browse to the downloaded files in the directory **CX-Designer_Lib_Update** (where these installation directions were found)

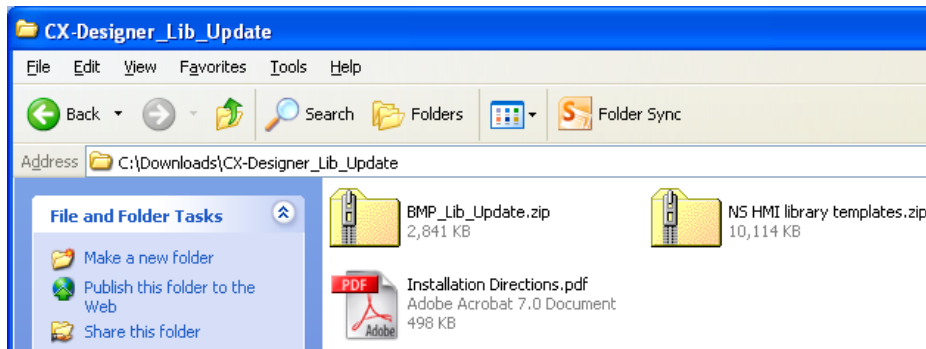

- 3) Extract the file *NS HMI library templates.zip* to any location (the default directory is suggested)

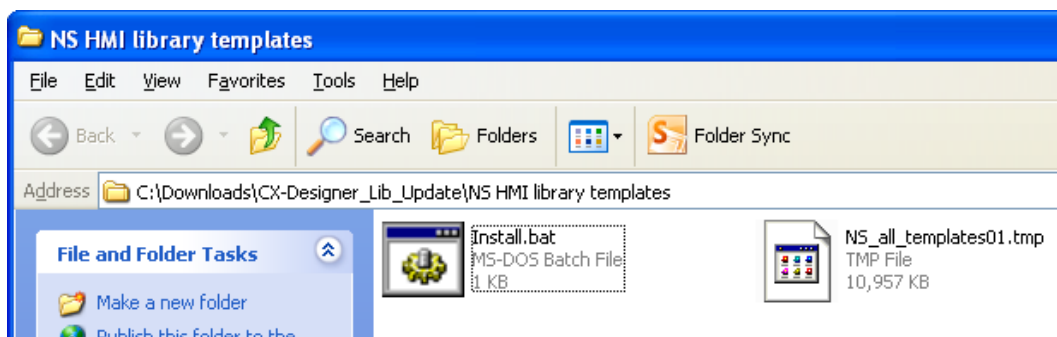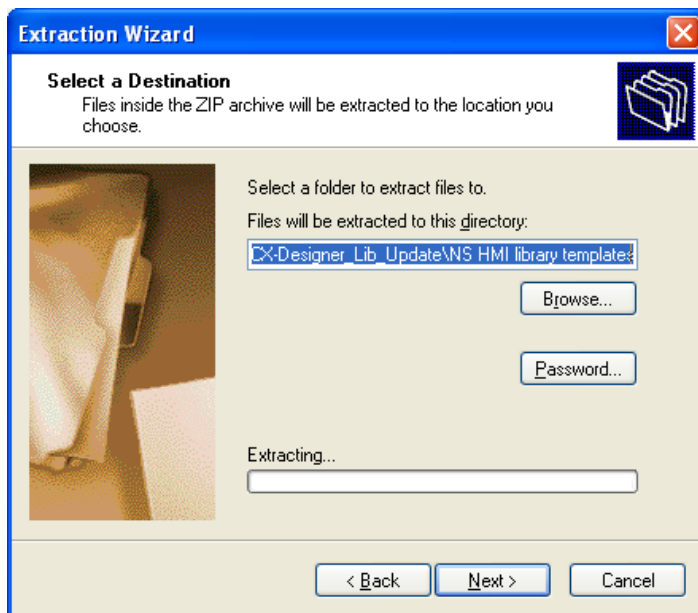

- 4) Launch the executable file *Install.bat* and follow the directions shown:

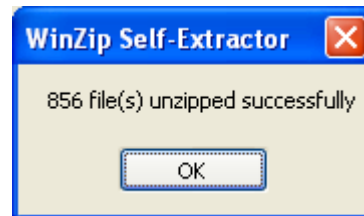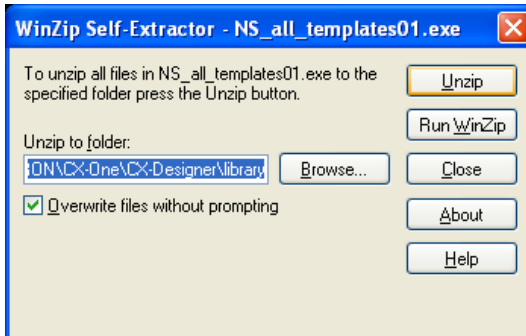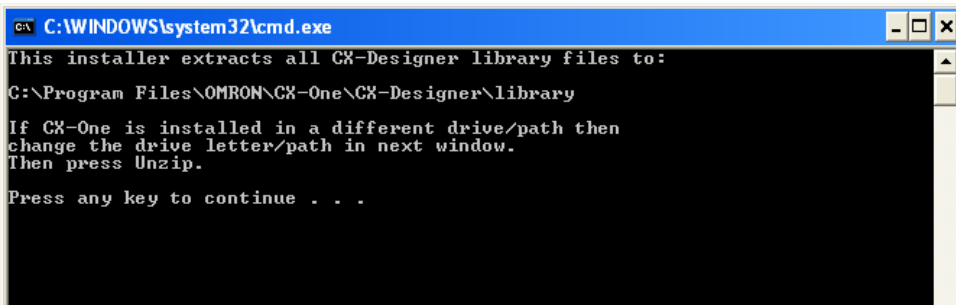

- 5) The Library Update is complete, and the new CX-Designer Library Template items can be found in the *Library* window for complete screen design templates, categorized by NS-Series size.

